


Company Name	
Project Name	
Reference	



**SC-F-M DN80 ViraPlus -
Air and Dirt Separators With Magnet**
NRF nr. 8560943

Design Criteria	
Medium	Water/glycol (max.%50)
Max. Flow velocity	1,5 m/s
Max. Flow rate	30 m3/h
Primary flow rate (Qp)	NA
Secondary flow rate (Qs)	NA
Max. Capacity (ΔT 20)	
Max. Pressure	10 barg
Max. Temperature	110°C
Pressure Drop at max.flow	2,9 kPa
Design Standard	EN 13445

Technical Drawing

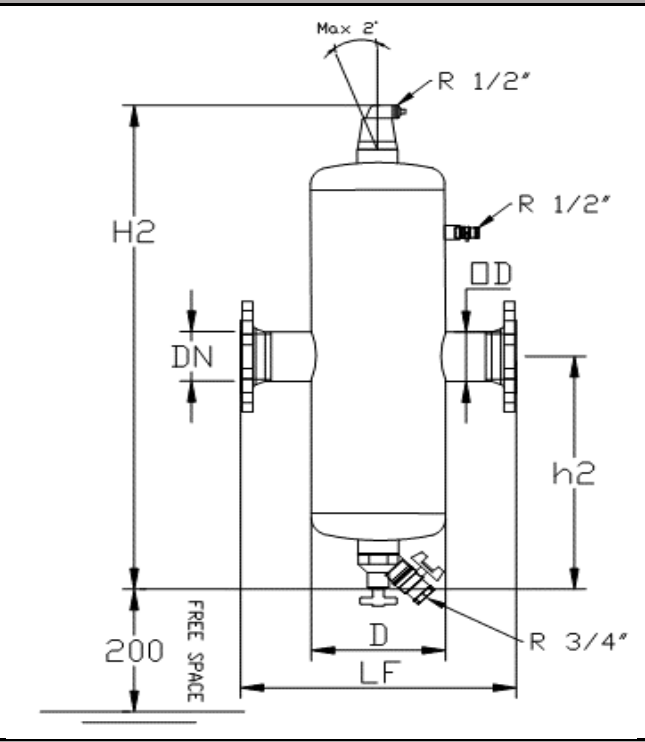

Testing and Quality Assurance	
Pressure Test (bar)	15 bar
Medium Test	Water
Test certificate	no
Design and manufacturing acc.2014/68/EC	yes art.4.3/SEP
Material certificates (structural parts)	no
Drawing	no
Weld procedures	no
Nondestructive testing (X-ray: 10%)	no
Notified body inspection	no

Construction Materials	
Body	S235 JR G2 (ST 37)
Connections	S235 JR G2 (ST 37)
Fittings	S235 JR G2 (ST 37)
Grooved End	S235 JR G2 (ST 37)
Heads	S235 JR G2 (ST 37)

Dimension

Deaeration cap	Brass	DN	DN80/200	
Valve sealing	EPDM	OD	88,9	mm
Float	PP	H2	885	mm
Internal mesh	316 Stainless Steel	h2	410	mm
Wire for magnet	316 Stainless Steel	LF	470	mm
Solder	Soft	D	219,1	mm
Paint	Electrostatic	Flow		
Color	Blue (RAL 5002)	Volume	24	lt
Drain valve	Brass	Weight	29	kg
Magnet	Neodymium			

Products produced before 19.07.2016 are according to 97/23/EC